



# Contents

- language models
- n-grams
- Brown clustering for word representation

mostly based on Jurafsky & Martin, 3<sup>rd</sup> edition,  
read Chapter 3.1 – 3.4

# Probabilistic Language Models

- The goal: assign a probability to a sentence

- Machine Translation:

- $P(\text{high winds tonight}) > P(\text{large winds tonight})$

- Spell Correction

Why?

- The office is about fifteen **minuets** from my house

- $P(\text{about fifteen minutes from}) > P(\text{about fifteen minuets from})$

- Speech Recognition

- $P(\text{I saw a van}) \gg P(\text{eyes awe of an})$

- + Summarization, question-answering, etc., etc.!!

# Probabilistic Language Modeling

- Goal: compute the probability of a sentence or sequence of words:

$$P(W) = P(w_1, w_2, w_3, w_4, w_5 \dots w_n)$$

- Related task: probability of an upcoming word:

$$P(w_5 | w_1, w_2, w_3, w_4)$$

- A model that computes either of these:

$P(W)$  or  $P(w_n | w_1, w_2 \dots w_{n-1})$  is called a **language model**.

- A better name would be: **the grammar model**
- But **language model** or **LM** is standard

# How to compute $P(W)$

- How to compute this joint probability:

$P(\text{its, water, is, so, transparent, that})$

- Intuition: let's rely on the Chain Rule of Probability

## Reminder: The Chain Rule

- Recall the definition of conditional probabilities

$$p(\mathbf{B} | \mathbf{A}) = \mathbf{P}(\mathbf{A}, \mathbf{B}) / \mathbf{P}(\mathbf{A}) \quad \text{Rewriting: } \mathbf{P}(\mathbf{A}, \mathbf{B}) = \mathbf{P}(\mathbf{A})\mathbf{P}(\mathbf{B} | \mathbf{A})$$

- More variables:

$$P(A, B, C, D) = P(A)P(B | A)P(C | A, B)P(D | A, B, C)$$

- The Chain Rule in General

$$P(x_1, x_2, x_3, \dots, x_n) = P(x_1)P(x_2 | x_1)P(x_3 | x_1, x_2) \dots P(x_n | x_1, \dots, x_{n-1})$$

The Chain Rule applied to compute joint probability of words in sentence

$$P(w_1 w_2 \dots w_n) = \prod_i P(w_i | w_1 w_2 \dots w_{i-1})$$

P(“its water is so transparent”) =

P(its) × P(water | its) × P(is | its water)

× P(so | its water is) × P(transparent | its water is so)

# How to estimate these probabilities

- Could we just count and divide?

$$P(\text{the | its water is so transparent that}) = \frac{\textit{Count}(\textit{its water is so transparent that the})}{\textit{Count}(\textit{its water is so transparent that})}$$

- No! Too many possible sentences!
- We'll never see enough data for estimating these



# Markov Assumption



Andrei Markov

- The memory is short
- First order Markov assumption

$P(\text{the | its water is so transparent that}) \gg P(\text{the | that})$

- The second order Markov assumption

$P(\text{the | its water is so transparent that}) \gg P(\text{the | transparent that})$

## Using Markov Assumption

$$P(w_1 w_2 \dots w_n) \approx \prod_i P(w_i \mid w_{i-k} \dots w_{i-1})$$

- In other words, we approximate each component in the product

$$P(w_i \mid w_1 w_2 \dots w_{i-1}) \approx P(w_i \mid w_{i-k} \dots w_{i-1})$$

## Simplest case: Unigram model

$$P(w_1 w_2 \dots w_n) \approx \prod_i P(w_i)$$

Some automatically generated sentences from a unigram model

fifth, an, of, futures, the, an, incorporated, a,  
a, the, inflation, most, dollars, quarter, in, is,  
mass

thrift, did, eighty, said, hard, 'm, july, bullish

that, or, limited, the

# Bigram model

- Condition on the previous word:

$$P(w_i | w_1 w_2 \dots w_{i-1}) \approx P(w_i | w_{i-1})$$

texaco, rose, one, in, this, issue, is, pursuing, growth, in,  
a, boiler, house, said, mr., gurria, mexico, 's, motion,  
control, proposal, without, permission, from, five, hundred,  
fifty, five, yen

outside, new, car, parking, lot, of, the, agreement, reached

this, would, be, a, record, november

# N-gram models

- We can extend to trigrams, 4-grams, 5-grams
- In general this is an insufficient model of language
  - because language has **long-distance dependencies**:

“The computer(s) which I had just put into the machine room on the fifth floor is (are) crashing.”
- But we can often get away with N-gram models, at least in English.
- Why not in Slovene and many other languages?

# Estimating bigram probabilities

- The Maximum Likelihood Estimate

$$P(w_i | w_{i-1}) = \frac{\textit{count}(w_{i-1}, w_i)}{\textit{count}(w_{i-1})}$$

$$P(w_i | w_{i-1}) = \frac{c(w_{i-1}, w_i)}{c(w_{i-1})}$$

# An example

<s> I am Sam </s>

<s> Sam I am </s>

<s> I do not like green eggs and ham </s>

$$P(w_i | w_{i-1}) = \frac{c(w_{i-1}, w_i)}{c(w_{i-1})}$$

$$P(\mathbf{I} | \langle \mathbf{s} \rangle) = \frac{2}{3} = .67$$

$$P(\mathbf{Sam} | \langle \mathbf{s} \rangle) = \frac{1}{3} = .33$$

$$P(\mathbf{am} | \mathbf{I}) = \frac{2}{3} = .67$$

$$P(\langle \mathbf{s} \rangle | \mathbf{Sam}) = \frac{1}{2} = 0.5$$

$$P(\mathbf{Sam} | \mathbf{am}) = \frac{1}{2} = .5$$

$$P(\mathbf{do} | \mathbf{I}) = \frac{1}{3} = .33$$

## More examples: Restaurant sentences

- can you tell me about any good cantonese restaurants close by
- mid priced thai food is what i'm looking for
- tell me about chez panisse
- can you give me a listing of the kinds of food that are available
- i'm looking for a good place to eat breakfast
- when is caffe venezia open during the day



# Raw bigram counts

- Out of 9222 sentences

	i	want	to	eat	chinese	food	lunch	spend
i	5	827	0	9	0	0	0	2
want	2	0	608	1	6	6	5	1
to	2	0	4	686	2	0	6	211
eat	0	0	2	0	16	2	42	0
chinese	1	0	0	0	0	82	1	0
food	15	0	15	0	1	4	0	0
lunch	2	0	0	0	0	1	0	0
spend	1	0	1	0	0	0	0	0

# Raw bigram probabilities

- Normalize by unigrams:

- Result:

i	want	to	eat	chinese	food	lunch	spend
2533	927	2417	746	158	1093	341	278

	i	want	to	eat	chinese	food	lunch	spend
i	0.002	0.33	0	0.0036	0	0	0	0.00079
want	0.0022	0	0.66	0.0011	0.0065	0.0065	0.0054	0.0011
to	0.00083	0	0.0017	0.28	0.00083	0	0.0025	0.087
eat	0	0	0.0027	0	0.021	0.0027	0.056	0
chinese	0.0063	0	0	0	0	0.52	0.0063	0
food	0.014	0	0.014	0	0.00092	0.0037	0	0
lunch	0.0059	0	0	0	0	0.0029	0	0
spend	0.0036	0	0.0036	0	0	0	0	0

# Bigram estimates of sentence probabilities

$$\begin{aligned} P(\langle s \rangle \text{ I want english food } \langle /s \rangle) &= \\ &P(\text{I} | \langle s \rangle) \\ &\times P(\text{want} | \text{I}) \\ &\times P(\text{english} | \text{want}) \\ &\times P(\text{food} | \text{english}) \\ &\times P(\langle /s \rangle | \text{food}) \\ &= .000031 \end{aligned}$$

# What kinds of knowledge?

- $P(\text{english} | \text{want}) = .0011$
- $P(\text{chinese} | \text{want}) = .0065$
- $P(\text{to} | \text{want}) = .66$
- $P(\text{eat} | \text{to}) = .28$
- $P(\text{food} | \text{to}) = 0$
- $P(\text{want} | \text{spend}) = 0$
- $P(i | \langle s \rangle) = .25$

## Practical Issues

- We do everything in log space
  - Avoid underflow
  - (also adding is faster than multiplying)

$$\log(p_1 \cdot p_2 \cdot p_3 \cdot p_4) = \log p_1 + \log p_2 + \log p_3 + \log p_4$$

# Google Book N-Grams, 2006

That's why we decided to share this enormous dataset with everyone. We processed 1,024,908,267,229 words of running text and are publishing the counts for all 1,176,470,663 five-word sequences that appear at least 40 times. There are 13,588,391 unique words, after discarding words that appear less than 200 times.

# Google N-Gram Release

- serve as the incoming 92
- serve as the incubator 99
- serve as the independent 794
- serve as the index 223
- serve as the indication 72
- serve as the indicator 120
- serve as the indicators 45
- serve as the indispensable 111
- serve as the indispensable 40
- serve as the individual 234

<http://googleresearch.blogspot.com/2006/08/all-our-n-gram-are-belong-to-you.html>

# Language Modeling Tools

- are ngram language models still useful?
- yes, e.g., in speech processing
- mostly replaced by neural LMs
- many variants of adapted neural LMs exist, e.g., word2vec, fastText, ELMo, BERT



# Evaluation: How good is our model?

- Does our language model prefer good sentences to bad ones?
  - Assign higher probability to “real” or “frequently observed” sentences
    - Than “ungrammatical” or “rarely observed” sentences?
- We train parameters of our model on a **training set**.
- We test the model’s performance on data we haven’t seen.
  - A **test set** is an unseen dataset that is different from our training set, totally unused.
  - An **evaluation metric** tells us how well our model does on the test set.
- Two types of evaluation
  - intrinsic (internal)
  - extrinsic (external, on a downstream task)

# Extrinsic evaluation of N-gram models

- Best evaluation for comparing models A and B
  - Put each model in a task
    - spelling corrector, speech recognizer, MT system
  - Run the task, get an accuracy for A and for B
    - How many misspelled words corrected properly
    - How many words translated correctly
  - Compare accuracy for A and B

# Difficulty of extrinsic (in-vivo) evaluation of N-gram models

- Extrinsic evaluation
  - Time-consuming; can take days or weeks
- So
  - Sometimes use **intrinsic** evaluation: **perplexity**
  - Bad approximation
    - unless the test data looks **just** like the training data
    - So **generally only useful in pilot experiments**
  - But is helpful to think about.

# Intuition of Perplexity

- The Shannon Game:

- How well can we predict the next word?

I always order pizza with cheese and \_\_\_\_\_

The 33<sup>rd</sup> President of the US was \_\_\_\_\_

I saw a \_\_\_\_\_

- Unigrams are terrible at this game. (Why?)

- A better model of a text

- is one which assigns a higher probability to the word that actually occurs

mushrooms 0.1

pepperoni 0.1

anchovies 0.01

....

fried rice 0.0001

....

and 1e-100

# Perplexity

The best language model is one that best predicts an unseen test set

- Gives the highest  $P(\text{sentence})$

Perplexity is the inverse probability of the test set, normalized by the number of words:

$$\begin{aligned} PP(W) &= P(w_1 w_2 \dots w_N)^{-\frac{1}{N}} \\ &= \sqrt[N]{\frac{1}{P(w_1 w_2 \dots w_N)}} \end{aligned}$$

Chain rule:

$$PP(W) = \sqrt[N]{\prod_{i=1}^N \frac{1}{P(w_i | w_1 \dots w_{i-1})}}$$

For bigrams:

$$PP(W) = \sqrt[N]{\prod_{i=1}^N \frac{1}{P(w_i | w_{i-1})}}$$

**Minimizing perplexity is the same as maximizing probability**

# Perplexity as branching factor

- Let's suppose a sentence consisting of random digits
- What is the perplexity of this sentence according to a model that assign  $P=1/10$  to each digit?

$$\begin{aligned} \text{PP}(W) &= P(w_1 w_2 \dots w_N)^{-\frac{1}{N}} \\ &= \left(\frac{1}{10}\right)^{-\frac{1}{N}} \\ &= \frac{1}{10}^{-1} \\ &= 10 \end{aligned}$$

Lower perplexity = better model

- Training 38 million words, test 1.5 million words, WSJ

<b>N-gram Order</b>	<b>Unigram</b>	<b>Bigram</b>	<b>Trigram</b>
Perplexity	962	170	109

# The Shannon Visualization Method

- Choose a random bigram

(`<s>`, `w`) according to its probability

`<s>` I

I want

want to

to eat

eat Chinese

Chinese food

food `</s>`

- Now choose a random bigram  
(`w`, `x`) according to its probability

- And so on until we choose `</s>`

- Then string the words together

I want to eat Chinese food



# Approximating Shakespeare

1  
gram

–To him swallowed confess hear both. Which. Of save on trail for are ay device and rote life have

–Hill he late speaks; or! a more to leg less first you enter

2  
gram

–Why dost stand forth thy canopy, forsooth; he is this palpable hit the King Henry. Live king. Follow.

–What means, sir. I confess she? then all sorts, he is trim, captain.

3  
gram

–Fly, and will rid me these news of price. Therefore the sadness of parting, as they say, 'tis done.

–This shall forbid it should be branded, if renown made it empty.

4  
gram

–King Henry. What! I will go seek the traitor Gloucester. Exeunt some of the watch. A great banquet serv'd in;

–It cannot be but so.

# Shakespeare as corpus

- $N=884,647$  tokens,  $|V|=29,066$
- Shakespeare produced 300,000 bigram types out of  $|V|^2=844$  million possible bigrams.
  - So 99.96% of the possible bigrams were never seen (have zero entries in the table)
- Quadrigrams worse: What's coming out looks like Shakespeare because it *is* Shakespeare

# The Wall Street Journal

**1**  
gram  
Months the my and issue of year foreign new exchange's september were recession exchange new endorsed a acquire to six executives

**2**  
gram  
Last December through the way to preserve the Hudson corporation N. B. E. C. Taylor would seem to complete the major central planners one point five percent of U. S. E. has already old M. X. corporation of living on information such as more frequently fishing to keep her

**3**  
gram  
They also point to ninety nine point six billion dollars from two hundred four oh six three percent of the rates of interest stores as Mexico and Brazil on market conditions

# What is the source of these random 3-gram sentences?

- They also point to ninety nine point six billion dollars from two hundred four oh six three percent of the rates of interest stores as Mexico and gram Brazil on market conditions
- This shall forbid it should be branded, if renown made it empty.
- “You are uniformly charming!” cried he, with a smile of associating and now and then I bowed and they perceived a chaise and four to wish for.

# The perils of overfitting

- N-grams only work well for word prediction if the test corpus looks like the training corpus
  - In real life, it often doesn't
  - We need to train robust models that generalize!
  - One kind of generalization: Zeros!
    - Things that don't ever occur in the training set
      - But occur in the test set

# Zeros

- Training set:
  - ... denied the allegations
  - ... denied the reports
  - ... denied the claims
  - ... denied the request

$$P(\text{"offer"} \mid \text{denied the}) = 0$$

- Test set
  - ... denied the offer
  - ... denied the loan

# Zero probability bigrams

- Bigrams with zero probability
  - mean that we will assign 0 probability to the test set!
- And hence we cannot compute perplexity (can't divide by 0)!

# The intuition of smoothing

- When we have sparse statistics:

$P(w \mid \text{denied the})$


3 allegations

2 reports

1 claims

1 request

7 total

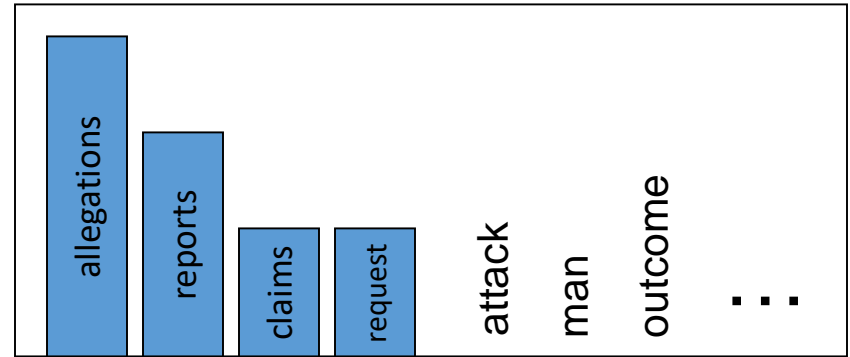

- Steal probability mass to generalize better

$P(w \mid \text{denied the})$

2.5 allegations


1.5 reports

0.5 claims

0.5 request

2 other

7 total

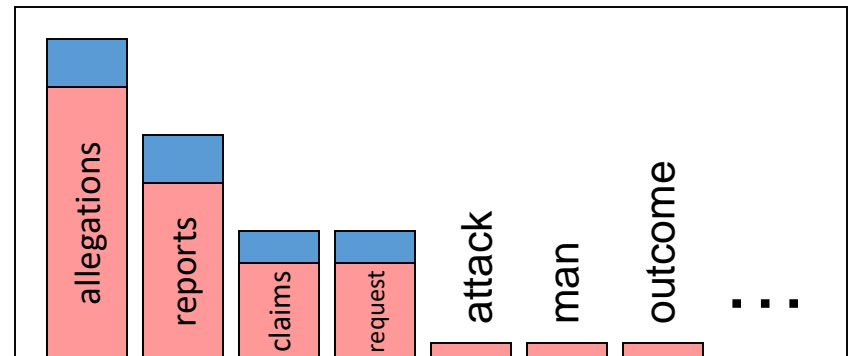



# Add-one estimation

- Also called Laplace smoothing
- Pretend we saw each word one more time than we did
- Just add one to all the counts!

- MLE estimate:  
(maximum likelihood) 
$$P_{MLE}(w_i | w_{i-1}) = \frac{c(w_{i-1}, w_i)}{c(w_{i-1})}$$

- Add-1 estimate: 
$$P_{Add-1}(w_i | w_{i-1}) = \frac{c(w_{i-1}, w_i) + 1}{c(w_{i-1}) + V}$$

# Add-1 estimation is a blunt instrument

- Add-1 isn't used for N-grams (why?)
  - We'll see better methods
- But add-1 is used to smooth other NLP models
  - For text classification
  - In domains where the number of zeros isn't so huge.

# Backoff and Interpolation

- Sometimes it helps to use **less** context
  - Condition on less context for contexts you haven't learned much about
- **Backoff:**
  - use trigram if you have good evidence,
  - otherwise bigram, otherwise unigram
- **Interpolation:**
  - mix unigram, bigram, trigram
- Interpolation works better

# Linear Interpolation

- Simple interpolation

$$\hat{P}(w_n | w_{n-2} w_{n-1}) = \lambda_1 P(w_n | w_{n-2} w_{n-1}) + \lambda_2 P(w_n | w_{n-1}) + \lambda_3 P(w_n) \quad \sum_i \lambda_i = 1$$

- Lambdas conditional on context:

$$\hat{P}(w_n | w_{n-2} w_{n-1}) = \lambda_1(w_{n-2}^{n-1}) P(w_n | w_{n-2} w_{n-1}) + \lambda_2(w_{n-2}^{n-1}) P(w_n | w_{n-1}) + \lambda_3(w_{n-2}^{n-1}) P(w_n)$$

# How to set the lambdas?

- Use a **held-out** corpus



- Choose  $\lambda$ s to maximize the probability of held-out data:
  - Fix the N-gram probabilities (on the training data)
  - Then search for  $\lambda$ s that give largest probability to held-out set:

$$\log P(w_1 \dots w_n | M(l_1 \dots l_k)) = \sum_i \log P_{M(l_1 \dots l_k)}(w_i | w_{i-1})$$

# Unknown words:

## Open versus closed vocabulary tasks

- If we know all the words in advanced
  - Vocabulary  $V$  is fixed
  - Closed vocabulary task
- Often we don't know this
  - **Out Of Vocabulary** = OOV words
  - Open vocabulary task
- Instead: create an unknown word token <UNK>
  - Training of <UNK> probabilities
    - Create a fixed lexicon  $L$  of size  $V$
    - At text normalization phase, any training word not in  $L$  changed to <UNK>
    - Now we train its probabilities like a normal word
  - At decoding time
    - If text input: Use UNK probabilities for any word not in training

# Brown clustering

- An agglomerative clustering algorithm that clusters words based on which words precede or follow them
- These word clusters can be turned into a kind of vector
- We'll give a very brief sketch here.

# Brown language model

- the class-based language model based on clusters
- each word belongs to a class (cluster) with probability  $p(w|c)$
- language models is defined based on transitions between clusters and not words

$$P(w_i|w_{i-1}) = P(c_i|c_{i-1})P(w_i|c_i)$$

- probability of corpus is computed as

$$p(\text{corpus}|C) = \prod_{i=1}^n P(c_i|c_{i-1})P(w_i|c_i)$$

- this LM is not good enough for machine translation or speech recognition(better exist, including n-gram LM) but suitable for clustering




# Brown clustering algorithm

- Each word is initially assigned to its own cluster.
- We now consider merging each pair of clusters. Highest quality merge is chosen.
  - Quality = merges two words that have similar probabilities of preceding and following words
  - More technically:  
quality = smallest decrease in the likelihood of the corpus according to a class-based language model
- Clustering proceeds until all words are in one big cluster.

# Brown clusters as vectors

- By tracing the order in which clusters are merged, the model builds a binary tree from bottom to top.
- Each word represented by binary string = path from root to leaf
- Each intermediate node is a cluster
- Chairman is 0010, “months” = 01, and verbs = 1

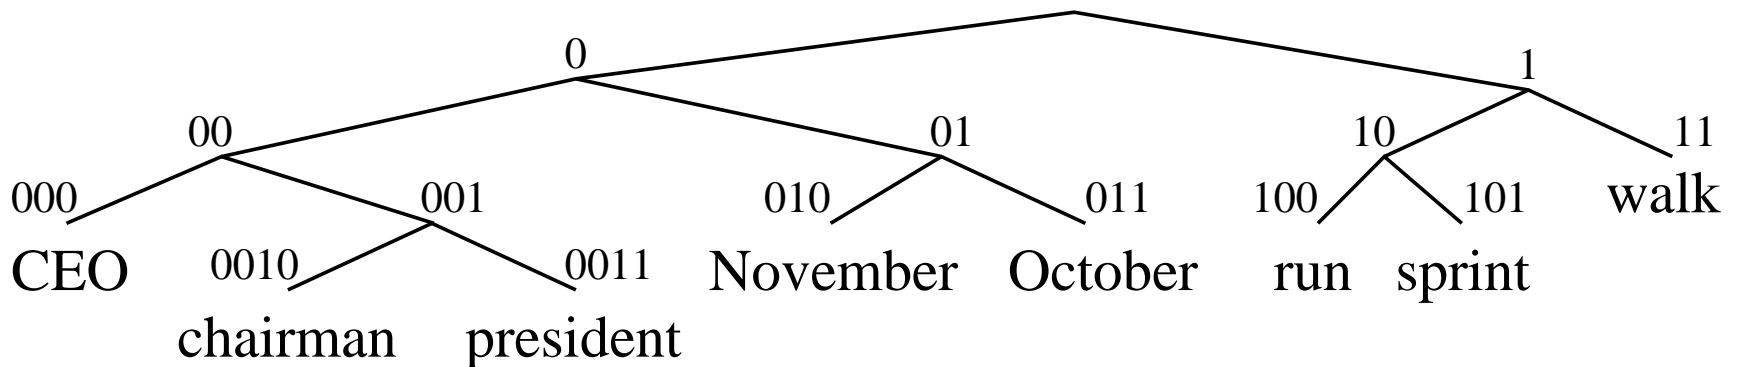

# Brown cluster examples

Friday Monday Thursday Wednesday Tuesday Saturday Sunday weekends Sundays Saturdays  
June March July April January December October November September August  
pressure temperature permeability density porosity stress velocity viscosity gravity tension  
anyone someone anybody somebody  
had hadn't hath would've could've should've must've might've  
asking telling wondering instructing informing kidding reminding bothering thanking deposing  
mother wife father son husband brother daughter sister boss uncle  
great big vast sudden mere sheer gigantic lifelong scant colossal  
down backwards ashore sideways southward northward overboard aloft downwards adrift